

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number  
**WO 2005/059586 A1**

(51) International Patent Classification<sup>7</sup>: **G01S 7/52, A61B 8/08**

(21) International Application Number:  
PCT/IB2004/052697

(22) International Filing Date: 7 December 2004 (07.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/529,782 16 December 2003 (16.12.2003) US

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS, N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JONG, Jing-Ming** [CN/US]; P.O. Box 3003, Bothell, Washington 98041-3003 (US).

(74) Common Representative: **KONINKLIJKE PHILIPS ELECTRONICS, N.V.**; c/o W. Brinton Yorks, Jr. P.O. Box 3003, Bothell, WA 98041-3003 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declaration under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,

[Continued on next page]

(54) Title: **ULTRASONIC DIAGNOSTIC IMAGING SYSTEM WITH AUTOMATIC CONTROL OF PENETRATION, RESOLUTION AND FRAME RATE**

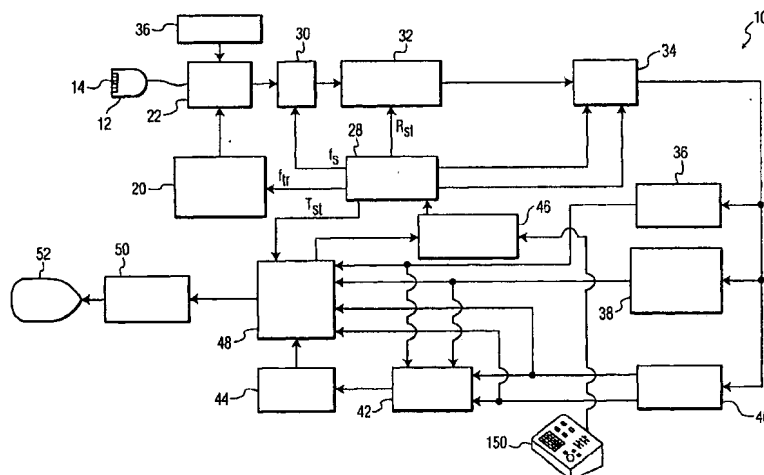

(57) Abstract: An ultrasonic diagnostic imaging system and method are presented in which the balance between image resolution and frame rate (Res/Speed) and the balance between image resolution and penetration (Pen/Gen/Res) are automatically adjusted in response to image content. A motion detector analyzes the relative motion between successive images. If the motion content is relatively high, the imaging parameters are changed in favor of relatively greater frame rate and reduced resolution. A low motion content causes the opposite adjustment. The electronic noise between successive images is also computed with a relatively high noise content (low correlation) in the far field resulting in an adjustment to penetration as by lowering the transmit frequency. A relatively low noise content causes an adjustment in favor of increased resolution.

WO 2005/059586 A1



EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

ULTRASONIC DIAGNOSTIC IMAGING SYSTEM WITH  
AUTOMATIC CONTROL OF PENETRATION, RESOLUTION AND  
FRAME RATE

5           This invention relates to medical diagnostic imaging systems and, in particular, to diagnostic imaging systems which automatically control ultrasonic imaging for optimal tissue penetration, imaging frame rate, and image resolution.

          Ultrasonic diagnostic imaging applications can differ widely in the imaging conditions encountered. When imaging the fetal heart for instance a  
10       high frame rate of display is required to accurately image the detail of a rapidly beating heart. In other applications such as the diagnosis of tumors in the liver, a high frame rate is not necessary but a high image quality (resolution) is generally preferred. In some cases the pathology being diagnosed may be deep within the patient's body. In other cases the pathology may be just beneath the skin. These  
15       widely differing conditions mean that the sonographer frequently has to change a wide variety of settings on the ultrasound system in order to acquire the best images for a given examination. It would be desirable to minimize the number of ultrasound system settings which need to be manipulated in order to set up the system for a new exam. In particular, it would be desirable for many of the  
20       manual settings of an ultrasound system to be automated when possible so that the ultrasound system would automatically optimize the operational settings of the system on the basis of the examination being performed.

          In accordance with the principles of the present invention, an ultrasonic diagnostic imaging system is described which automates two of the most  
25       frequently used user settings, the Res/Speed control and the Pen/Gen/Res control. The Res/Speed control adjusts the trade-off between image quality (resolution) and frame rate (speed) by varying imaging parameters such as image line density, multiline order, and number of focal zones. The Pen/Gen/Res control adjusts the trade-off between image resolution and the depth of  
30       penetration of ultrasound through control of imaging parameters such as the transmit and receive frequencies. In an illustrated embodiment the setting of these controls is automated by sensing the amount of motion and/or noise in the anatomy being imaged. In response to the sensed image motion and/or noise, the relevant image parameters are automatically varied to obtain images which  
35       are a sensible balance of these competing factors.

In the drawings:

FIGURE 1 illustrates in block diagram form an ultrasonic diagnostic imaging system constructed in accordance with the principles of the present invention.

5       FIGURE 2 illustrates an implementation of a Res/Speed control on an ultrasound system and a Pen/Gen/Res control on an ultrasound system.

FIGURE 3 illustrates an ultrasound sector image which has been divided into image sub-regions for motion analysis.

10       FIGURE 4 illustrates a methodology for analyzing motion in successive ultrasound images.

FIGURE 5 illustrates the correlation of types of information in successive ultrasound images.

Referring first to FIGURE 1, an ultrasonic diagnostic imaging system constructed in accordance with the principles of the present invention is shown in block diagram form. An ultrasonic scanhead 12 includes an array 14 of  
15       ultrasonic transducers that transmit and receive ultrasonic pulses. The array may be a one dimensional linear or curved array for two dimensional imaging, or may be a two dimensional matrix of transducer elements for electronic beam steering in three dimensions. The ultrasonic transducers in the array 14 transmit  
20       ultrasonic energy and receive echoes returned in response to this transmission. A transmit frequency control circuit 20 controls the transmission of ultrasonic energy at a desired time and at a desired frequency or band of frequencies through a transmit/receive ("T/R") switch 22 coupled to the ultrasonic  
25       transducers in the array 14. The times at which the transducer array is activated to transmit signals may be synchronized to an internal system clock (not shown), or may be synchronized to a bodily function such as the heart cycle, for which a heart cycle waveform is provided by an ECG device 26. When the heartbeat is at the desired phase of its cycle as determined by the waveform provided by ECG device 26, the scanhead is commanded to acquire an ultrasonic image. The  
30       ultrasonic energy transmitted by the scanhead 12 can be relatively high energy (high mechanical index or MI) which destroys or disrupts contrast agent in the image field, or it can be relatively low energy which enables the return of echoes from the contrast agent without substantially disrupting it. The frequency and bandwidth of the ultrasonic energy generated by the transmit frequency control  
35       circuit 20 is controlled by a control signal  $f_{tr}$  and the times at which individual

elements in the array are actuated to steer and focus an ultrasonic beam in a desired direction is controlled by a control signal  $T_s$ . Both control signals are generated by a central controller 28.

5 Echoes from the transmitted ultrasonic energy are received by the transducers in the array 14, which generate echo signals that are coupled through the T/R switch 22 and digitized by analog to digital ("A/D") converters 30 when the system uses a digital beamformer. Analog beamformers may also be used. The A/D converters 30 sample the received echo signals at a sampling frequency controlled by a signal  $f_s$  generated by the central controller 28. The desired  
10 sampling rate dictated by sampling theory is at least twice the highest frequency of the received passband, and might be on the order of at least 30-40 MHz. Sampling rates higher than the minimum requirement are also desirable.

The echo signal samples from the individual transducers in the array 14 are delayed and summed by a beamformer 32 to form coherent echo signals in a  
15 desired beam steering direction specified by a control signal  $R_s$ . The digital coherent echo signals are then filtered by a digital filter 34. In this embodiment, the transmit frequency and the receiver frequency are individually controlled so that the beamformer 32 is free to receive a band of frequencies which is different from that of the transmitted band. The digital filter 34 bandpass filters the  
20 signals, and can also shift the frequency band to a lower or baseband frequency range. The digital filter could be a filter of the type disclosed in U.S. Patent No. 5,833,613.

Filtered echo signals from tissue are coupled from the digital filter 34 to a B mode processor 36 for conventional B mode processing. The B mode image  
25 may also be created from microbubble echoes returning in response to nondestructive ultrasonic imaging pulses.

Filtered echo signals of a contrast agent, such as microbubbles, are coupled to a contrast signal processor 38. The contrast signal processor 38 preferably separates echoes returned from harmonic contrast agents by the pulse  
30 inversion technique, in which echoes resulting from the transmission of multiple pulses to an image location are combined to cancel fundamental signal components and enhance harmonic components. A preferred pulse inversion technique is described in U.S. patent 6,186,950, for instance. The detection and imaging of harmonic contrast signals at low MI is described in U.S. patent  
35 6,171,246.

The filtered echo signals from the digital filter 34 are also coupled to a Doppler processor 40 for conventional Doppler processing to produce velocity and power Doppler signals. The outputs of these processors may be displayed as planar images, and are also coupled to a 3D image rendering processor 42 for the rendering of three dimensional images, which are stored in a 3D image memory 44. Three dimensional rendering may be performed as described in U.S. patent 5,720,291, and in U.S. patents 5,474,073 and 5,485,842, all of which are incorporated herein by reference.

The signals from the contrast signal processor 38, the B-mode processor 36 and the Doppler processor 40, and the three dimensional image signals from the 3D image memory 44 are coupled to a Cineloop® memory 48, which stores image data for each of a large number of ultrasonic images. The image data are preferably stored in the Cineloop memory 48 in sets, with each set of image data corresponding to an image obtained at a respective time. The sets of image data for images obtained at the same time during each of a plurality of heartbeats are preferably stored in the Cineloop memory 48 in the same way. The image data in a group can be used to display a parametric image showing tissue perfusion at a respective time during the heartbeat. The groups of image data stored in the Cineloop memory 48 are coupled to a video processor 50, which generates corresponding video signals for presentation on a display 52. The video processor 50 preferably includes persistence processing, whereby momentary intensity peaks of detected contrast agents can be sustained in the image, such as described in U.S. patent 5,215,094.

In accordance with the principles of the present invention a motion/noise processor 46 is provided to detect the motion of objects and/or noise in the image field. This is done in the illustrated embodiment by a correlation process such as a Pearson's correlation which will be discussed more fully below. The criteria against which the results of the correlation process are compared are determined by the setting of either a Res/Speed control or a Pen/Gen/Res control or both by user adjustment of a control on a user interface 150 as discussed below. The results of the detection of motion and/or noise in the image field are used to automatically adjust the settings of either or both of the Res/Speed control and the Pen/Gen/Res control. The adjustments optimize the operation of the ultrasound system to provide clearer, better resolved images by adjustment of imaging parameters in response to the outcome of the detection of motion and/or

noise.

Examples of a Res/Speed control and a Pen/Gen/Res control are shown in FIGURE 2. While these controls may be hardware knobs or sliders on a control panel, in this embodiment the controls are display controls generated by software on the screen of the ultrasound display 52. The controls may be displayed as dials or meters or other graphics displayed in various shapes and colors, and may have either qualitative or quantitative settings. In this embodiment both are qualitative bar displays 60. The Res/Speed control 62 is variable between "Res" (maximum resolution) and "Speed" (maximum frame rate) and proportions of these maximum settings therebetween. The Pen/Gen/Res control 64 is variable between "Pen" (maximum penetration) and "Res" (maximum image resolution) and proportions of these maximum settings therebetween centered around a nominal general setting "Gen". The effect of the current setting of each control is shown by a marker 66 in the bar, which is positioned in accordance with the effective setting currently applied to the ultrasound images. An arrow 68 can be adjusted by a user pointing device such as a trackball or key or mouse on the control panel 150 to manually set a control setting.

The Res/Speed control and the Pen/Gen/Res control can be independently set for either manual control or automatic control. When a control is set for manual control its setting can only be adjusted by manual manipulation of the user. When a control is set for manual control its marker 66 is greyed out and moves in tandem with the constantly aligned arrow 68 as the user adjusts the arrow to vary the control setting. When a control is set for automatic operation its marker 66 is brightly displayed and the arrow 68 and the marker can move independently. When the user manually adjusts the arrow 68 in the automatic mode, the image will vary in response to the manual variation and the marker 66 will align with the last setting of the arrow. Once manual control of the arrow is released, automatic operation commences. As the motion and/or noise characteristic of the image field is detected and used to determine appropriate automatic settings for the Res/Speed control and/or the Pen/Gen/Res control, the marker 66 will move automatically to show the current setting resulting from automatic control. The user can see at a glance how the automatic setting has changed from his or her last manual setting, and can see the response of the control setting to the motion and noise detected in the image

field.

If the user is dissatisfied with the response of the automatic operation of a control, the user can reset the position of the arrow 68 of the control.

Resetting the arrow during automatic operation will reset the balance of the  
5        respective performance factors of the control and will also adjust the manner in  
which the automatic adjustments discussed below are made. For instance, if the  
user resets the arrow toward more resolution (Res), the subsequent automatic  
adjustments can more greatly favor changes in the direction toward a greater Res  
setting. Resetting the manual adjustment arrow of the controls can thus adjust  
10       the degree to which the automatic system balances the competing effects of  
resolution, frame rate, and depth of penetration.

Motion-detecting capabilities are often found in ultrasound systems for a  
variety of purposes. Various sensors have been used to detect the motion of an  
ultrasound probe, such as those described in US Pat. 5,529,070 (Augustine et  
15       al.) and US Pat. 5,538,004 (Bamber). Motion may also be sensed by comparing  
successive real time images as described in US Pats. 6,299,579 (Peterson et al.);  
6,238,345 (Wissler et al.); 6,117,081 (Jago et al.); 5,782,766 (Weng et al.);  
5,575,286 (Weng et al.); 5,566,674 (Weng); 5,899,861 (Freimel et al.);  
5,910,114 (Nock et al.); and WO 00/24316 (Hossack et al.) The motion sensing  
20       or image alignment techniques described in these patents are used for purposes  
such as aligning individual images to create a panoramic image or to remove  
motional distortion from images. Any one of these techniques can be used in an  
automated system of the present invention. In an embodiment of the present  
invention the motion or alignment information is used to adjust the Res/Speed  
25       setting. Higher image quality and a lower frame rate setting is employed when  
motion is relatively low, and lower image quality and a higher frame rate is  
employed when motion is relatively high.

An embodiment of an automated control of the present invention can  
start with a sequence of ultrasound images such as image 70 in FIGURE 3.  
30       Each image is analytically divided into a plurality of blocks 72 of a  
predetermined pixel size, such as 8 pixels by 8 pixels or 16 pixels by 16 pixels.  
For a rectangular image the blocks may be oriented in a rectilinear grid pattern.  
For a sector image such as image 70 of FIGURE 3 the blocks can be arranged in  
a curve-linear fashion according to the curvature of the sector. Motion is then  
35       computed between corresponding blocks of successive images, as shown in



FIGURE 4. In this illustration a block 82 of pixels in Img 1 acquired at one point in time is compared with the neighborhood of a corresponding block 84 of an image Img 2 acquired at a different point in time. The next motion computation uses the block 84 in Img 2 and a corresponding block 86 in image  
 5 Img 3 acquired at another point in time. For each block a motion vector can be derived by finding the maximal Pearson correlation between the two pixel patterns. The formula for this computation is:

$$\rho = \frac{\sum_{x,y} (I_{t1}(x,y) - \bar{I}_{t1}) (I_{t2}(x+d_x, y+d_y) - \bar{I}_{t2})}{\sqrt{\sum_{x,y} (I_{t1}(x,y) - \bar{I}_{t1})^2} \sqrt{\sum_{x,y} (I_{t2}(x+d_x, y+d_y) - \bar{I}_{t2})^2}}$$

10

where  $I(x,y)$  is the pixel intensity at coordinates  $(x,y)$ , the indices  $t1$  and  $t2$  indicate image frames at different time point,  $\bar{I}$  is the average intensity in the pixel block, and  $(d_x, d_y)$  is the magnitude (distance) and direction of the local motion between two image frames. The correlation value  $\rho$  indicates the  
 15 reliability of the motion vector  $(d_x, d_y)$ .

15

The motion vectors and/or correlation coefficients for a plurality of blocks are then examined. The motion vectors and/or correlation coefficients for all of the blocks can be examined, or only a selected set of blocks can be used, such as those in the center of the image 70. If the magnitude of the motion  
 20 vectors is large for most blocks, or the correlation value  $\rho$  is low for most blocks, the frame rate is increased by incrementing the setting of the Res/Speed control from Res toward Speed. The resultant command from the motion/noise processor 46 to the central controller 28 causes the central controller to change the commands to the probe 12 in a manner which increases the frame rate. One  
 25 way to do this is to increase the angle or spacing of the beam steering between adjacent beams through a change to the beam steering parameter  $T_{st}$ . With the beams more widely spaced, fewer beams will be transmitted in the area or volume scanned by the probe which causes the frame rate to increase. That is, with fewer beams to transmit and receive to acquire a frame or volume, the  
 30 image area can be scanned in less time. The increase in the beam spacing decreases the spatial sampling of the image area or volume, causing a corresponding decrease in image resolution. Another way to do this is to

increase the multiline order: instead of receiving one or two receive beams in response to a transmit beam, the point spread function can be changed to receive two or four receive beams in response to each of a lesser number of transmit beams. Yet another possibility is to reduce the number of focal zones of the image. For instance, each pair of consecutive focal zones can be combined into one focal zone, with the focus set at the boundary of the two original zones. Thus, the Res/Speed setting has been adjusted in a direction which tends to increase frame rate (Speed) but with decreased image resolution (Res).

Correspondingly, if the magnitude of the motion vectors is small for most blocks, or the correlation value  $\rho$  is high for most blocks, indicating little motion between images, the image quality is increased by changing the setting from Speed to Res. The command from the motion processor 46 to the central controller 28 now effects an increase in the beam density by changing the beam steering parameter  $T_s$  to transmit a greater number of more closely spaced transmit beams which are properly received by a change of the receive beam parameter  $R_s$ . The multiline order can also be decreased from four to two or two to one, for instance, for a greater number of transmit beams. The number of focal zones can also be increased by splitting one or more current focal zones into two. These changes will all effect an adjustment of the Res/Speed setting in a direction which tends to increase image resolution (Res) with a decrease in the frame rate (Speed).

As these adjustments are made the position of the marker 66 is changed accordingly in the Res/Speed bar 62. This is generally done by changing the value for the marker which is sent from the motion/noise processor 46 to a graphics processor (not shown) which processes the graphic overlay of the Res/Speed control for display with the ultrasound image.

A similar approach can be used to automatically adjust the Pen/Gen/Res control 64 setting as a function of image signal/noise. FIGURE 5 illustrates the decorrelation of pure speckle images with motion. This plot is made of the change in correlation as a planar imaging probe travels in the elevational direction. As it does so and the image plane moves in the elevational direction, the speckle information begins to decorrelate over the entire image. In FIGURE 5 the X-axis is the distance of travel of the probe in mm and the Y-axis is the correlation between images. The different curves represent the change in correlation at different image depths shown by the legends in box 94. It can be

seen that the correlation changes at different rates, depending upon image depth. The solid line curves indicated at 90 for near and mid-field depths show a smooth decline in correlation as the image plane travels, gradually decreasing with increasing distance. However, the dashed curves indicated at 92 for the far field (greater depths) are marked by a sharp drop with a small change in distance, followed by a more gradual decrease. This large initial drop in correlation is believed to be caused by the decorrelation of electronic noise (signal/noise) in the far field and directly related to imaging penetration. A response to a sharp drop in correlation is an adjustment of the Pen/Gen/Res setting toward increased penetration (Pen), as for example by decreasing the transmit frequency or switching from harmonic frequency reception to fundamental frequency reception. See, by comparison, US Pat. 6,458,083 (Jago, et al.) and US Pat. 6,283,919 (Roundhill et al.) By aligning consecutive image frames through motion compensation and computing the image decorrelation, an appropriate adjustment can be made to the Pen/Gen/Res control to render the best image resolution with optimal imaging penetration. This feature is particularly useful when the clinician is frequently changing the imaging depth during scanning.

Turning again to FIGURES 3 and 4, the correlation is computed for a plurality of pixel blocks 72 of consecutive images. The correlation in the far field is compared with the correlation in the near and/or mid field or the correlation for the entire image. If the correlation is relatively low in the far field and the correlation is relatively high elsewhere, the penetration is increased by adjusting the Pen/Gen/Res control from Res or Gen toward Pen. This effects a command from the motion/ noise processor 46 to the central controller 28 which causes the central controller to command a change in the operating frequency. This can be effected by changing the transmit frequency parameter  $f_t$  to a lower transmit frequency, reducing the passband of the digital filter 34, or a combination of the two. If blended fundamental/harmonic information is used in the far field, the blending ratio of the two types of signal content can be adjusted in favor of more fundamental signal frequency content. Alternatively, more pulses can be transmitted in each beam direction and greater signal averaging employed. Corresponding, the marker 66 of the Pen/Gen/Res control bar 64 is adjusted toward the Pen end of the control on the displayed graphic.

Similarly, if the correlation is relatively high throughout the image, that is, is not particularly low in the far field, the operating frequency can be

increased to increase resolution, and the Pen/Gen/Res control is adjusted from Pen or Gen toward Res. The motion processor commands the central controller 28 to increase the operating frequency by increasing the value of the transmit frequency parameter  $f_{tr}$ , increasing the passband of the digital filter 34, or both.

5 If blended fundamental/harmonic information is used in the far field, the blending ratio of the two types of signal content can be adjusted in favor of more harmonic signal frequency content. A corresponding adjustment toward Res is made to the marker 66 displayed in the Pen/Gen/Res control 64.

In an embodiment of the present invention, more efficient computation

10 may be obtained by using fewer pixel blocks 72 and the sum of absolute difference (SAD) algorithm. See US Pat. 6,442,298 (Olsson et al.)

Corresponding pixel blocks of successive images can be compared to compute the motion (displacement) vector from block to block over the time interval between the two images. Then, using this vector, one of the image is warped

15 (aligned) with the other on either a local or global basis. See US Pat. 5,566,674 (Weng). This alignment reduces the decorrelation between images due to probe or tissue motion, leaving the signal/noise (electronic noise) factor as a decorrelative effect. The number of pixel blocks used in the alignment computation can be fewer than the number used in the subsequent correlation

20 analysis to reduce computation time, if desired. The correlation of the aligned or warped images is then computed as described above to automatically adjust the Pen/Gen/Res control setting.

## WHAT IS CLAIMED IS:

1. A method for automatically adjusting the relationship between image resolution (Res) and real time frame rate (Speed) of an ultrasound system comprising:
  - acquiring a plurality of ultrasound images over time;
  - sensing the relative motion between temporally different ultrasound images; and
  - increasing the image resolution and decreasing the frame rate in response to relatively less sensed motion or decreasing the image resolution and increasing the frame rate in response to relatively greater sensed motion.
2. The method of Claim 1, wherein sensing comprises calculating the correlation of the pixel content of temporally different ultrasound images, wherein a relatively high correlation corresponds to relatively less motion and a relatively low correlation corresponds to relatively greater motion.
3. The method of Claim 1, wherein sensing comprises sensing relative motion with a probe motion sensing device.
4. The method of Claim 1, wherein sensing comprises sensing relative motion by analyzing the image content of successive ultrasound images.
5. The method of Claim 1, wherein the ultrasound system includes a Res/Speed display of the relationship between image resolution and frame rate; and further comprising automatically adjusting Res/Speed display in correspondence with a change made to the image resolution and/or frame rate.
6. The method of Claim 5, wherein the Res/Speed display includes a user adjustable setting which enables a user to manually balance the relationship between image resolution and frame rate of the ultrasound system.
7. The method of Claim 6, wherein manual adjustment of the Res/Speed display adjusts the manner in which subsequent automatic adjustments to the balance between image resolution and frame rate will be

made.

8. The method of Claim 1, wherein the frame rate is changed by changing at least one of the transmit beam density, multiline order, number of focal zones, or number of transmit pulses.

9. The method of Claim 8, wherein the image resolution is changed by changing the spatial sampling of the image field.

10. A method for automatically adjusting the relationship between image resolution (Res) and the depth of penetration (Pen) of an ultrasound system comprising:  
acquiring a plurality of ultrasound images over time;  
calculating the electronic noise between temporally different ultrasound images; and  
increasing the image resolution in response to relatively less electronic noise or increasing the penetration in response to relatively greater electronic noise.

11. The method of Claim 10, wherein calculating the electronic noise comprises calculating the decorrelation of electronic noise between regions of successively acquired images.

12. The method of Claim 11, wherein calculating the electronic noise further comprises comparing the correlation of far field signals with the correlation of signals elsewhere in the images.

13. The method of Claim 12, wherein when the comparison shows a relatively low correlation in the far field and a relatively high correlation elsewhere, the operating frequency of the ultrasound system is automatically decreased, and when the comparison shows a relatively high correlation in the far field and elsewhere, the operating frequency of the ultrasound system is automatically increased.

14. The method of Claim 10, wherein increasing the image resolution

comprises increasing at least one of the transmit or receive frequency of the ultrasound system, and wherein increasing the penetration comprises decreasing at least one of the transmit or receive frequency of the ultrasound system.

5           15.     The method of Claim 10, further comprising aligning the temporally different ultrasound images prior to calculating the electronic noise.

10           16.     The method of Claim 10, wherein the ultrasound system includes a Pen/Gen/Res display of the relationship between image resolution and depth of penetration; and further comprising automatically adjusting Pen/Gen/Res display in correspondence with a change made to the balance between resolution and penetration.

15           17.     The method of Claim 16, wherein increasing the image resolution comprises increasing an operating frequency of the ultrasound system; wherein increasing the penetration comprises decreasing an operating frequency of the ultrasound system; and wherein automatically adjusting the Pen/Gen/Res display comprises adjusting the display toward Pen when the operating frequency is decreased and adjusting the display toward Res when the operating frequency is increased.

20           18.     The method of Claim 17, wherein automatically adjusting the Pen/Gen/Res display comprises adjusting the display toward Pen when fundamental frequency operation is performed and adjusting the display toward Res when harmonic operation is performed.

            19.     The method of Claim 17, wherein the operating frequency comprises at least one of the transmit frequency or the receive frequency.


30           20.     The method of Claim 16, further comprising manually adjusting the Pen/Gen/Res display to adjust the manner in which automatic adjustments to the balance between resolution and penetration will be made.

35           21.     An ultrasonic diagnostic imaging system comprising:  
a probe including an array transducer;

a transmitter coupled to apply drive signals to the array transducer;  
a receiver coupled to process signals received by the array transducer;  
a display coupled to the receiver which displays received ultrasound  
images;  
5 a sensor coupled to the probe which senses relative motion in the image  
field;  
a Res/Speed display responsive to the sensor which is shown on the  
display to depict the relative balance between image resolution and frame rate,  
wherein the transmitter is responsive to the sensor for adjusting the frame  
10 rate of the ultrasound images.

22. An ultrasonic diagnostic imaging system comprising:  
a probe including an array transducer;  
a transmitter coupled to apply drive signals to the array transducer;  
15 a receiver coupled to process signals received by the array transducer;  
a display coupled to the receiver which displays received ultrasound  
images;  
a sensor coupled to the probe which senses electronic noise in the image  
field;  
20 a Pen/Gen/Res display responsive to the sensor which is shown on the  
display to depict the relative balance between image resolution and penetration,  
wherein the transmitter is responsive to the sensor for adjusting the  
penetration of transmitted drive signals.



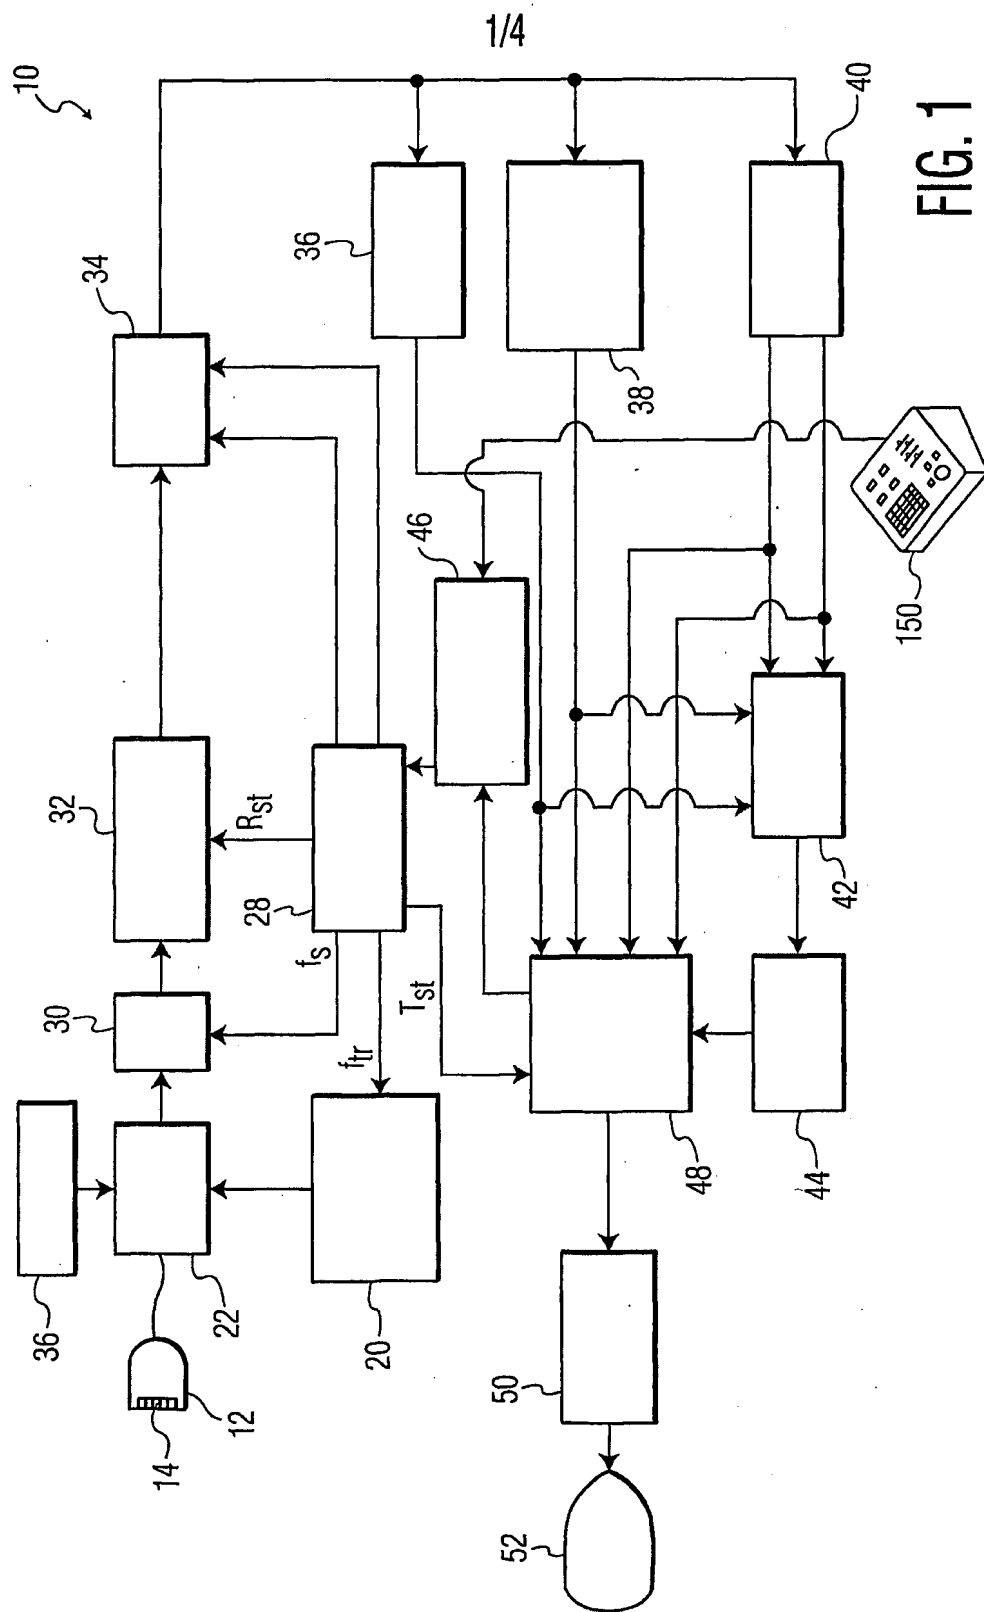

2/4

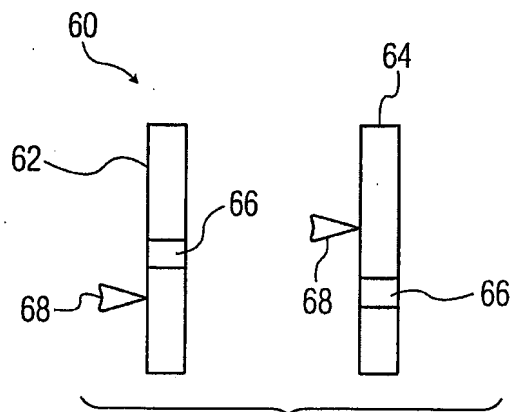


FIG. 2

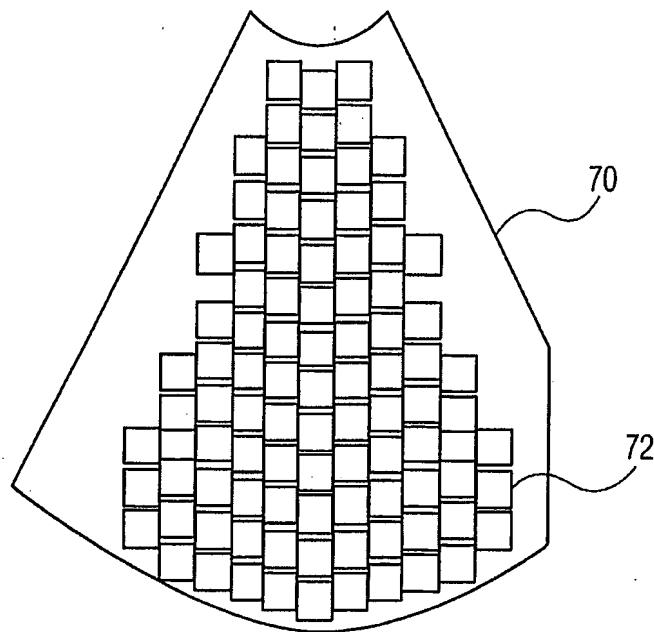


FIG. 3

3/4

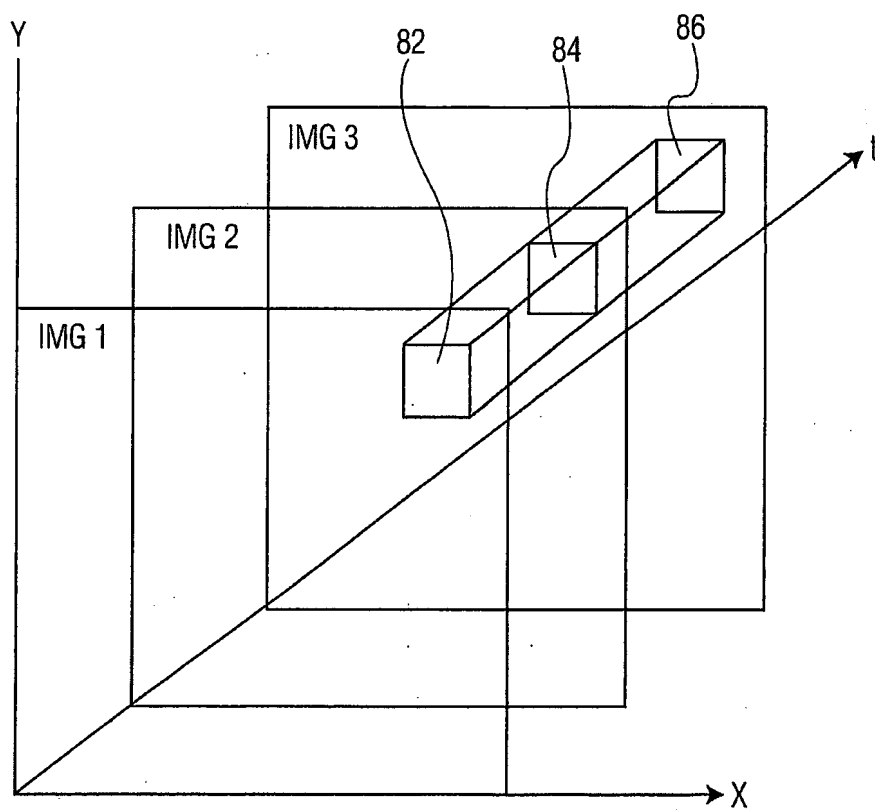


FIG. 4

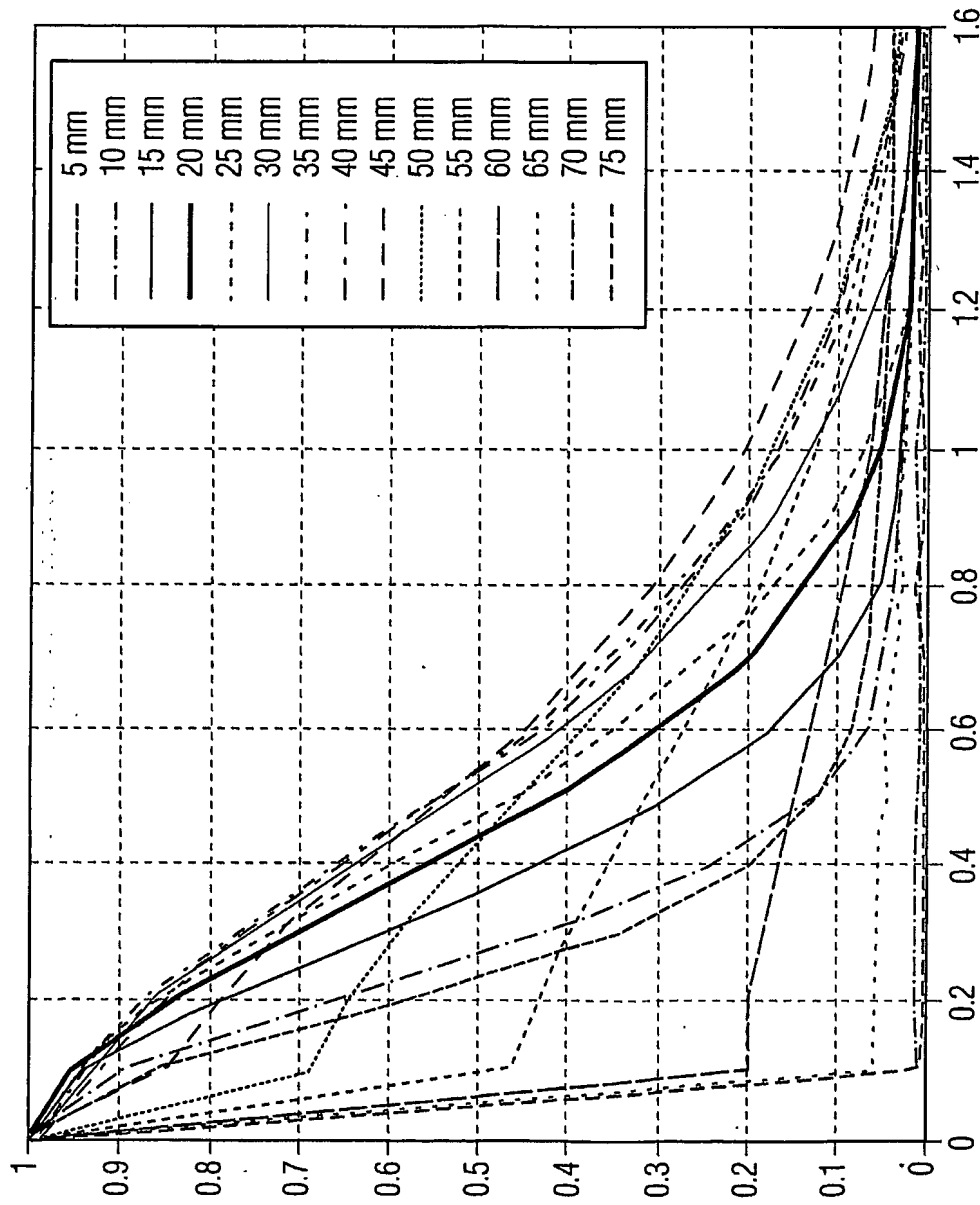


FIG. 5

## INTERNATIONAL SEARCH REPORT

PCT/IB2004/052697

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01S7/52 A61B8/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01S A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 873 830 A (HOSSACK ET AL) 23 February 1999 (1999-02-23)	1-4, 8, 9
Y	abstract; figures 1, 9-14 column 1, line 6 - column 3, line 67 column 5, line 11 - column 6, line 29 column 7, lines 5-63 column 8, lines 38-56 column 14, line 11 - column 19, line 55 claims 51-55	5-7, 21
Y	US 2003/028113 A1 (GILBERT JEFFREY M ET AL) 6 February 2003 (2003-02-06) abstract; figure 15D	5-7, 21
A	US 5 908 391 A (MUZILLA ET AL) 1 June 1999 (1999-06-01) the whole document	1-9, 21
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

11 February 2005

Date of mailing of the international search report

26. 04. 2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Reuss, T

## INTERNATIONAL SEARCH REPORT

PCT/IB2004/052697

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 797 846 A (SEYED-BOLORFOROSH ET AL) 25 August 1998 (1998-08-25) the whole document -----	1-9,21
A	ZHONG X ET AL: "Speckle tracking and motion compensation for ultrasound-based lesion localization" ULTRASONICS SYMPOSIUM, 1997. PROCEEDINGS., 1997 IEEE TORONTO, ONT., CANADA 5-8 OCT. 1997, NEW YORK, NY, USA, IEEE, US, vol. 2, 5 October 1997 (1997-10-05), pages 1381-1384, XP010271555 ISBN: 0-7803-4153-8 the whole document -----	1-9,21
A	WO 03/047433 A (KONINKLIJKE PHILIPS ELECTRONICS N.V) 12 June 2003 (2003-06-12) the whole document -----	1-9,21

# INTERNATIONAL SEARCH REPORT

PCT/IB2004/052697

## Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box III Observations where unity of invention is lacking (Continuation of Item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-9, 21

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-9,21

A method and apparatus for automatically adjusting the relationship between image resolution and real time frame rate wherein the relative motion between temporally different ultrasonic images is sensed and wherein the relationship between frame rate and resolution is automatically changed depending on the sensed motion.

---

2. claims: 10-20,22

A method and apparatus for automatically adjusting the relationship between image resolution and depth of penetration wherein the electronic noise between temporally different ultrasonic images is calculated and wherein the relationship between resolution and depth of penetration is changed depending on the calculated electronic noise, by changing the operating frequency of the ultrasound system.

---



## INTERNATIONAL SEARCH REPORT

PCT/IB2004/052697

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5873830	A	23-02-1999	US 6083168 A	04-07-2000
US 2003028113	A1	06-02-2003	US 6379304 B1	30-04-2002
			US 6248073 B1	19-06-2001
			US 5904652 A	18-05-1999
			US 5690114 A	25-11-1997
			US 5590658 A	07-01-1997
			US 5839442 A	24-11-1998
			AT 245056 T	15-08-2003
			AU 741952 B2	13-12-2001
			AU 7097698 A	17-07-1998
			CA 2275577 A1	02-07-1998
			DE 69723578 D1	21-08-2003
			DE 69723578 T2	15-04-2004
			EP 0949976 A2	20-10-1999
			JP 2001507794 T	12-06-2001
			US 6530887 B1	11-03-2003
			EP 1353195 A2	15-10-2003
			TW 447215 B	21-07-2001
			TW 521522 B	21-02-2003
			WO 9828631 A2	02-07-1998
			ZA 9711640 A	08-09-1998
			AU 700274 B2	24-12-1998
			AU 6344696 A	30-01-1997
			EP 0835458 A2	15-04-1998
			JP 11508461 T	27-07-1999
			US 5957846 A	28-09-1999
			US 5964709 A	12-10-1999
			CA 2225622 A1	16-01-1997
			TW 381226 B	01-02-2000
			WO 9701768 A2	16-01-1997
			US 6106472 A	22-08-2000
			ZA 9605568 A	29-01-1997
US 5908391	A	01-06-1999	CN 1208599 A ,C	24-02-1999
			DE 19819893 A1	12-11-1998
			IL 124166 A	29-06-2000
			IT MI980931 A1	02-11-1999
			JP 11028209 A	02-02-1999
			NO 982060 A	09-11-1998
US 5797846	A	25-08-1998	DE 19757479 A1	09-07-1998
			IL 122690 A	31-10-2000
			JP 10309276 A	24-11-1998
WO 03047433	A	12-06-2003	US 2003105401 A1	05-06-2003
			AU 2002365842 A1	17-06-2003
			EP 1476079 A2	17-11-2004
			WO 03047433 A2	12-06-2003